


SPECIFICATION

TRACCESS 230


TECHNICAL DATA

- Articulated boom (two elements) telescopic boom (main boom + 2 extension) + jib
- Sigma boom movement enabled by connecting rods
- 360° non continuous turret rotation on bearing turntable
- Proportional electro-hydraulic controls in basket
- Engine start and stop controls from basket
- Basket base in composite material with aluminium guardrails
- 90° right + 90° left hydraulic basket rotation
- Basket load sensing device
- Radio remote control
- Dual drive speed
- Narrow jacking facility
- Extending width tracks
- 230V 2.2 kW electric auxiliary motor
- 15 HP HONDA petrol engine
- Automatic hydraulically actuated basket levelling
- N°4 hydraulic outriggers with ground pressure sensors
- Hour meter
- 230 V AC EC electrical socket in the basket
- Standard boom colours blue (RAL 5017) or white (RAL 9010)
- CE certified

PLATFORM DIMENSIONS

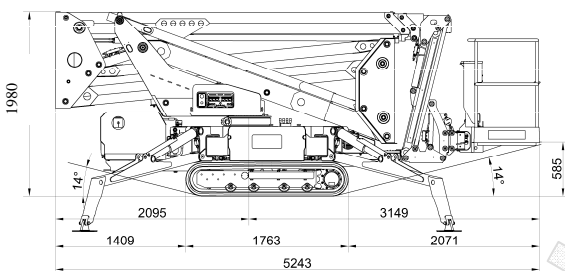

FOOT PRINT

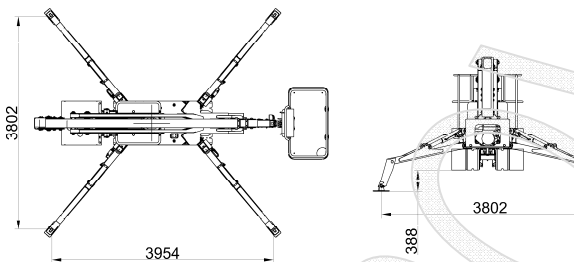

PERFORMANCE

Working height	22,6m
Platform height	20,6m
Working outreach	~ 12m
Capacity	200kg
Basket dim.	1300x700x1100mm
unit weight	~ 2,94t

WORKING ENVELOPE (fully extended stab.)

