





16. DP

Mobile ramp, with light weight and easy positioning through 2 lateral handles

PERFECT FOR:


- Occasional loads/unloads
- Low gradient
- Rapid loading in points not specifically reserved to these procedures

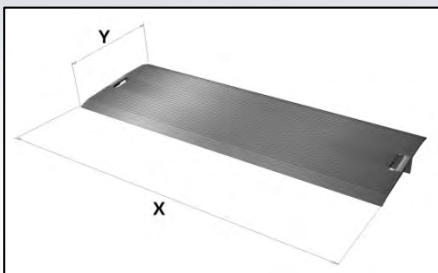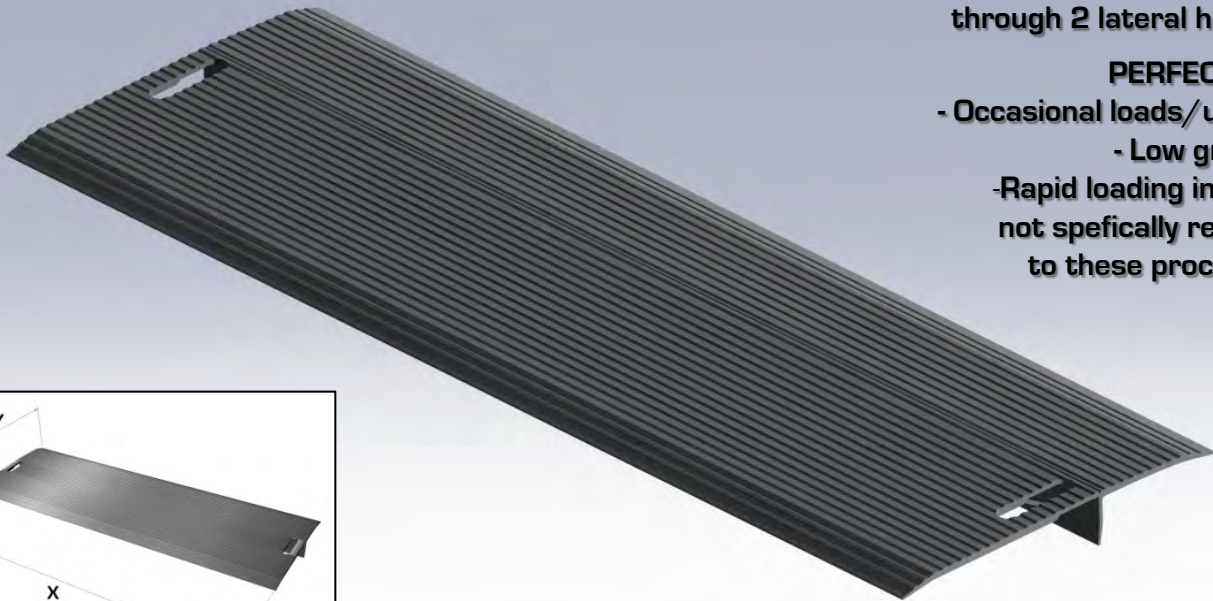

16a. DPC (bent lip)

CODE	X	Y	H+/-	WEIGHT
	(mm)	(mm)	(mm)	(Kg)
DPC 50	1100	490	70/70	19
DPC 90	1100	890	110/110	33
DPC 130	1100	1290	165/165	47
DPC 50A	1650	490	70/70	28
DPC 90A	1650	890	110/110	49
DPC 130A	1650	1290	165/165	70
DPC 50B	2000	490	70/70	34
DPC 90B	2000	890	110/11	59
DPC 130B	2000	1290	165/165	84


CAPACITY 4000 KG

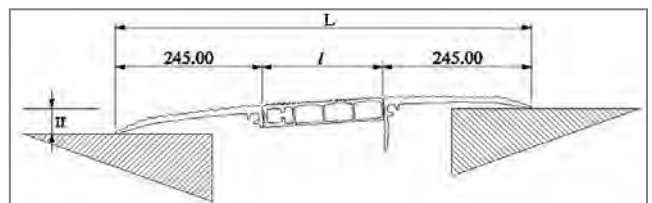

PERFECT WHEN TRUCK CAN BE HIGHER AND LOWER THAN LOADING BAY

16b. DPD (straight lip)

CODE	X	Y	H+/-	WEIGHT
	(mm)	(mm)	(mm)	(Kg)
DPD 60	1100	600	25/80	23
DPD 60A	1650	600	25/80	34
DPD 60B	2000	600	25/80	41

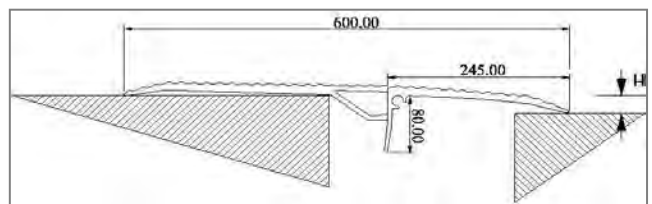

SMOOTHER LIP (MORE COMFORTABLE FOR LITTLE WHEELS VEHICLES) AND HIGHER CAPACITY

H+/- difference in height calculated according to UNI EN 1398 standard for **12,5%** gradient allowed for forklifts

CAPACITY 6000 KG