

Scalissima Plus



VIDEO



ISO 9000
UNI EN 287/1
EN ISO
9606/2

EN131
TESTED BY
TÜV

OPTIONALS & SPARE PARTS

- CONF2211 Wheels kit
- Sicurkit 100 cm & 60 cm (see page 29)
- SALLARUS3 Base stabilizer cm 84,4 (6/7/8/9 steps)
- SALLARUS5 Base stabilizer cm 103,8 (10/11/12 steps)
- SALLAR84 Telescopic stabilizer (6/7/8/9 gr.): (cm 74/92)
- SALLAR113 Telescopic stabilizer (10/11/12 gr.): (cm 85/103)
- CONF2200 • CONF2201 • CONF2210
- Foldable stabilizers (see Scalissima Elite model)



Allargatori telescopici richiudibili



Steel safety blocking hooks



CONF2200



CONF2201



CONF2210

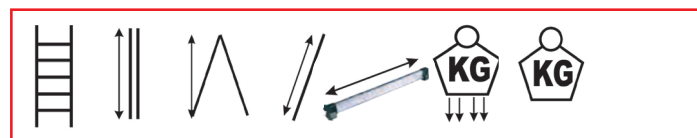


CONF2211




SALLAR84/SALLAR113

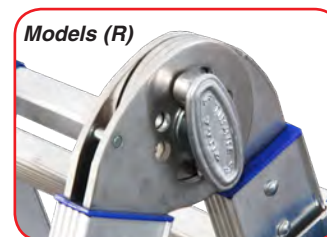
Telescopic top quality ribbed aluminium 3-in-1 ladder with large base especially designed for heavy duty use. It has reinforced profiles for better resistance to meet European Standards up to 12 rungs. It can be used as a stepladder, lean-to wall ladder and on stairs.



n.	m	m	m	mm	Kg	Kg
8+8A*	1,22	1,91	4,01	844	150	13,0
10+10A*R	1,50	2,44	5,15	1038	150	15,2
12+12A*R	1,78	2,94	6,25	1038	150	18,5
8+8	1,22	1,91	4,01	NO	150	12,0
10+10R	1,50	2,44	5,15	NO	150	14,2
12+12R	1,78	2,94	6,25	NO	150	17,5

Scalissima Plus 8+8A
with base stabilizer

SCALISSIMA PLUS IS A
QUALITY RANGE
WITH GREAT
DIMENSIONS AND
EQUIPMENT

Base stabilizer included in
models A*. Mandatory for EN131.

Aluminum lamellar hinge

Models (R)

Quick positioning of the hinges
allows:

- opening and closing as a step-ladder without modifying hinge position
- blocking ladder when used as a stepladder modifying hinge position
- opening/closing the ladder for use against walls by modifying hinge position



SveltBag tools holder

- Non-skid flanged rungs 27x27 mm
- Aluminium hinge knobs
- Steel safety blocking hooks covered in nylon
- Distance between rungs 28 cm
- Inner profile 63x27 mm
- Outer profile 70x31 mm
- Inner ramp width 36,5 cm
- Non-skid reinforced rubber feet
- SveltBag tools holder
- Thermo-shrinkable plastic package with showcard