

ECONOMIC SCISSOR LIFTS




Technical Features:

- Safe, light, easy to use and highly manoeuvrable
- High quality robust construction
- A range of maximum lift heights from 750mm to 1610mm
- Manual operation
- Single or double lifts available
- Heavy duty arm, bearings and hydraulics
- All wheels are fitted with sealed bearings and polyurethane tyres
- One castor fitted with a total stop brake as standard
- All models fitted with an overload valve and slow lowering valve to control lowering speed
- Each table is issued with operating instructions and a test certificate in conformance with EU Standards EN 1570 and BS:5323:1980

Technical Specification:

Capacity	A Raised Height	B Closed Height	Operation	CxD Platform L x W	Approx Weight	Reference
200KG	750	250	Manual Hyd	700 x 485	41	BD-SC-200-S-M
300KG	850	335	Manual Hyd	850 x 520	81	BD-SC-300-S-M
500KG	950	350	Manual Hyd	920 x 610	107	BD-SC-500-S-M
800KG	930	350	Manual Hyd	920 x 610	117	BD-SC-800-S-M
350KG	1610	430	Manual Hyd	920 x 610	134	BD-SC-350-D-M

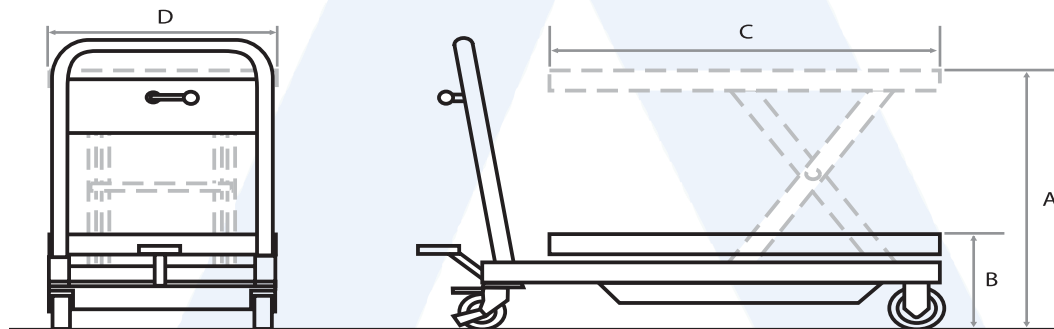

All measurements unless stated are in mm