



## Mago S



External step for easy climbing on the platform



Wooden platform with aluminium frame

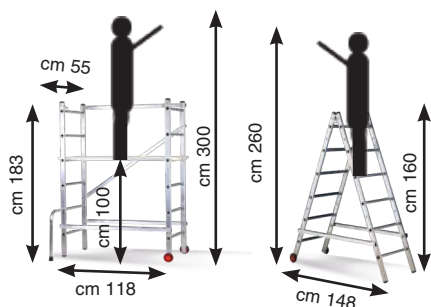

Small scaffold designed for light, domestic and "do-it-yourself" use. Transformable in ladder, it is built in very light aluminium and can be completely disassembled. It moves very easily through PVC wheels and passes through standard doors and corridors.

It can be used in 3 positions.

- Small scaffolding (3 m working height)
  - Single ladder with 6 rungs (2.8 m working height)
  - A frame ladder (working height 2,6 m)
- With the addition of the Optional Extension it can also be used in 3 other positions:
- A frame ladder with guardrail (working height 3,6 m)
  - Scaffolding used on stairs
  - A frame ladder used on stairs

- BASE DIMENSIONS: m 1,18x 0,55
- WEIGHT: 12 kg
- CAPACITY: 100 kg (including 1 person)
- PROFILE: 50 x 20 mm
- WHEELS: Ø 100 mm
- NON-SKID RUNG DISTANCE: 28 cm
- WORKING HEIGHT: 3,30 m
- WORKING PLATFORM: aluminium structure with wooden platform cm 107x50
- FEET: PVC
- Mago is equipped with poster, instruction manual and labels and is shrink-wrapped.



A frame ladder position



A frame ladder position with optional frame guardrail



Scaffolding position with optional frame to work on stairs



A frame ladder position with optional frame to work on stairs